




1. Assemble from the top, the socket board (A), screw the 2 poles (B) and pole (C) one by one into (A) clockwise to tighten.




2. Place the organizer shelf (D) upside down onto 3 already assembled poles (B and C). Make sure that 3 poles have passed through the organizer shelf (D).




3. Screw the 3 poles (N) into the first 3 assembled poles (B and C) through the organized shelf (D) to tighten. Place the thin shelf (E) onto the 3 poles (N).




4. Screw all 3 poles (F) one by one into 3 poles (N) through thin shelf (E) to tighten.

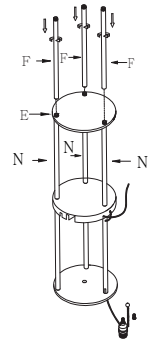

5. Set the base (G) onto 3 poles (F) with screw (H) by screw driver to tighten, then put cushion (I) into screw hole.

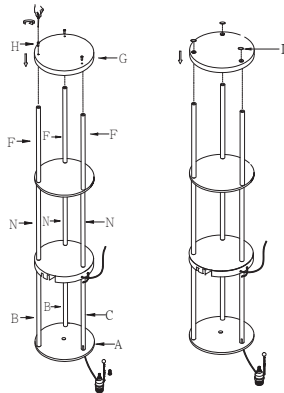

Then, turn the lamp over to up-right position set the socket into the socket board (A), the screw (K) with metal washer (J) clockwise to tighten, and pull the remaining slack of the power cord out carefully through point (O).

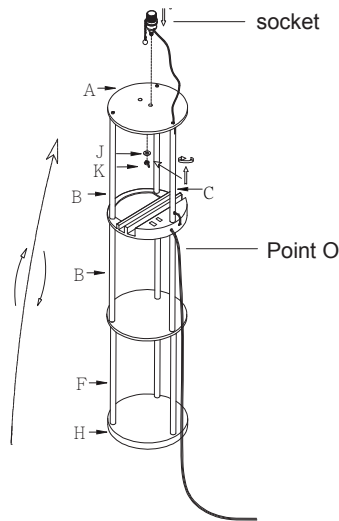

**Caution:**  
Load max weight 6 pounds

## GENERAL PRODUCT INFORMATION:

This product is suitable for dry locations only.




## IMPORTANT SAFETY INSTRUCTIONS:










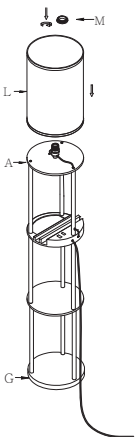




This portable lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. **DO NOT ALTER THE PLUG.**

**BULB TYPE:** (1) 150 watt standard incandescent or 42 watt CFL bulb equivalent. (not included)

6. Place shade (L) onto the socket, then screw the socket ring (M) clockwise to tighte.



Assemble KD shade according to the "shade assembly instruction".

A. Socket Board	B. Pole	C. Pole with Cord	D. Organizer Shelf	E. Thin Shelf	F. Pole	G. Base (Thick Board)
						
1 PC	2 PCS	1 PC	1 PC	1 PC	3 PCS	1 PC
H. Screw	I. Cushion	J. Metal Washer	K. Screw	L. Shade	M. Socket Ring	N. Pole
						
3 PCS	3 PCS	1 PC	1 PC	1 PC	1 PC	3 PCS